

Paper weight-110# (minimum)

Black nonfading ink required

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

For Public Land Survey Corners In:

WI ADMINISTRATIVE CODE A-E 7.08 REQUIREMENT

T. 3N. R. 11E. 4th P.M.

REV 10/23/2004

USMONREC.DWG

CORNER CODE INDEX

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25		
A																											A
B																											B
C																											C
D																											D
E																											E
F																											F
G																											G
H																											H
J																											J
K																											K
L																											L
M																											M
N																											N
O																											O
P																											P
Q																											Q
R																											R
S																											S
T																											T
U																											U
V																											V
W																											W
X																											X
Y																											Y
Z																											Z
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25		

PLACE MONUMENT SYMBOL AT PROPER LOCATION ON ABOVE INDEX

CENTER TWP

ROCK COUNTY WI

IF AVAILABLE

ROCK COUNTY COORDINATES PREFERRED

North _____ Elev. _____

East _____

Hor. Datum _____ Vert. Datum _____

LATITUDE _____ ELLIPS. HT. _____

LONGITUDE _____

NAD83(91) _____ NETWORK ADJ. YR _____

GPS (X) _____ TRAVERSE (X) _____

BASED ON THE FOLLOWING CONTROL:

CORNER MONUMENT

WITNESS MONUMENT

BEARINGS ARE BASED ON: _____

FIELD BOOK _____ PAGE # _____

SHEET 1 OF 4

SHOW A PLAN VIEW DRAWING DEPICTING THE CORNER MONUMENT AND SURROUNDING PHYSICAL FEATURES, INCLUDING THE EXCAVATION AREA AND DEPTH.

PLANNING & ZONING COMMITTEE ADOPTED THIS FORM ON 12/2/1982

CORNER CODE Z-15(2)

GE628 S1/4CORSEC34

(B) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

- 1833 MULLETT WEST ON SOUTH SIDE SECTION 34
2640SET QUARTER SECTION POST IN PRAIRIE AND
MADE MOUND
5280 SET POST CORNER SECTIONS 33 & 34 IN PRAIRIE
AND MADE MOUND LAND ROLLING PRAIRIE
SECOND RATE.**
- 1855 CHURCH VOL 1 PG 39 USED N 1/4 CORNER TO SUBDIVIDE
SECTION 3. SHOWS A DISTANCE OF 2638.35 FROM CENTER
OF SECTION 3 TO E & W 1/4 CORNERS.**
- 1868 LOCKE PLYMOUTH TWP REMONUMENTATION FIELD NOTES.
PLACED CUT LIMESTONE.
PG 48 WEST ON NORTH LINE SEC 3 VAR 7
2668.05 INTERSECTED 1/4 LINE FOR SEC 34 TOWN 3 N AT
COR. FOUND OLD STAKE IN CENTER OF HIGHWAY
AND IN LINE OF FENCES RUNNING NORTH AND
SOUTH.
2654.85 SET 1/4 COR 13.2' EAST OF 1/4 COR. FOR TOWN 3
THE SEC. CORRS WEST BEING LOST.
2979.9 CENTER SLUICE BRIDGE 5.28' WIDE
4068.9 CENTER SLUICE BRIDGE 5.28' WIDE
5300.13 INTERSECTED WEST BOUNDARY 12.62' SOUTH OF
COR. SET AS PREVIOUSLY STATED (PAGE 47) VAR
CORRECTED 6-44 MARKED 1/4 MONUMENT WITH
FIGURE 3 ON SOUTH FACE. SEPT 3 1868**
- 1886 RUGER VOL 2 PG 272 USED TO SUBDIVIDE SECTION 3 BUT
STATES NOTHING ABOUT THE N 1/4 CORNER SEC 3. SHOWS
A DISTANCE OF 2648.42 & VAR 4-35 FROM E 1/4 COR SEC 3
TO THE CENTER OF SECTION 3.**
- 1933 SUNNY VOL 3 PG 235 SET 1X36" PIPE IN CONG. PVMT. 0.4' N
OF CENTER OF SAME. CALLS FOR S 1/4 COR SEC 34 AS 13.2'
TO THE WEST. 2645.4 FROM N 1/4 COR SEC 3 TO NW COR
SEC 3 & 2653.6 FROM N 1/4 COR SEC 3 TO NE COR SEC 3.**
- 1970 BATTERMAN VOL 4 PG 484 SHOWS N 1/4 CORNER SEC 3
REFERENCED. STATES NOTHING ABOUT MON. 32.01 FROM
COR TO NW REFERENCE PIPE WITH NOTE 34.01 BY C.S.**
- 1972 SHIMEALL VOL 3 PG 235 NOTE STATES THAT HE PLACED A
1" PIPE @ N 1/4 COR SEC 3.**
- 1982 LEE GSM11-131 FD PK @ N 1/4 COR SEC 3**
- 1988 BARNES A-15 & Z-15 @ N 1/4 COR SEC 3 FD REROD AT ROAD
SURFACE. 6" DEEP FOUND PIPE IN CONCRETE PAVEMENT.
34" DEEP FOUND CUT LIMESTONE. PLACED MAGNET ON TOP
OF STONE. ACCEPTED FOUND CUT LIMESTONE. PIPE IS N50-
40-29E 0.10' & THE REROD IS N86-20-24E 0.17'
REFERENCED SAME. EXCAVATION FOR S 1/4 COR SEC 34
CENTER TWP IS SHOWN WEST OF LIMESTONE. S 1/4 COR SEC
34 CENTER TWP PLACED ON LINE WITH N 1/4 COR SEC 3 AND
NW COR SEC 3 AT RECORD DISTANCE WHICH IS S88-56-44W
13.20' OF THE CUT L.S. @ N 1/4 COR SEC 3 PLYMOUTH TWP.**
- 1988 BARNES VOL 6 PG 388 BEARINGS & DISTANCES ARE BASED
WIDOT CONTROL. S 1/4 COR SEC 34 TO SE COR SEC 34 IS
N88-43-23E 2667.91, S 1/4 COR SEC 34 TO SW COR SEC 34
IS S88-56-48W 2658.48, N 1/4 COR SEC 3 TO NE COR SEC 3
IS N88-43-19E 2654.71, N 1/4 COR SEC 3 TO NW COR SEC 3
IS S88-56-44W 2645.99, NW COR SEC 3 TO W 1/4 COR SEC 3
IS S1-27-22E 2587.08, NE COR SEC 3 TO E 1/4 COR SEC 3 IS
S01-04-00E 2701.33, SW COR SEC 34 TO W 1/4 COR SEC 34
IS N1-57-37W 2662.16, SW COR SEC 34 TO NW COR SEC 3 IS
26.40, & NW COR SEC 3 IS EAST OF SW COR SEC 34.**

Larry Barnes
10/13/2009

SHEET 1 OF 4
CORNER CODE Z-15(2)

CE628 S1/4CORSEC34

- 1989 WIDOT STH 11 MAP #16698 PROJECT 1704-03-22 @ N 1/4 COR SEC 3 FD CUT LIMESTONE 246,064.92; 2,220,619.41 S88-56-43W 13.20 TO S 1/4 COR SEC 34 MON TO BE SET 246,064.68; 2,220,606.21 1992 BARNES A-15(1) & Z-15(1) MONUMENT WILL BE DESTROYED BY CONSTRUCTION. REFERENCED SAME. S 1/4 COR 34 CENTER TWP IS S89-00-06W 13.20' (REC 13.20). @ S 1/4 COR SEC 34 CENTER TWP DOT DID NOT INSTALL A MON. ACCEPTED LOCATION AS PERPETUATED BY RECORD TIE DISTANCES.
- 1992 BARNES A-15(2) & Z-15(1) FOUND DOT DISK @ N 1/4 COR SEC 3. ACCEPTED FOUND CUT LIMESTONE. DID NOT ACCEPT DOT DISK. DISK IS 0.06' NORTH AND 0.04' EAST OF THE CORRECT POSITION. FOUND PREVIOUS REFERENCE MONUMENTS.
- 1993 COMBS GSM VOL 17 PG 75 DOT MON. @ N1/4 COR SEC 3, NW COR SEC 3, & SW SEC 34. FD PIPE @ S 1/4 COR SEC 33. 2658.31 FROM S 1/4 TO SW CORNERS OF SEC 34.
- 2003 BARNES A-15(3) USED MY OLD OBSERVATIONS. ACCEPTED FOUND CUT LIMESTONE
- 2004 BARNES PLYMOUTH TWP. REMONUMENTATION

PRIOR TO RESURFACING SEARCHED & DID NOT FD WIDOT DISKS @ SURFACE. FD 4 RECORD REFERENCE WIDOT MONUMENTS. AFTER RESURFACING, I FOUND PK/FLASHER. FLASHER STAMPED "WIDOT SURVEY" & IS JUST BELOW PVMT SURFACE.

C) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

ACCEPTED CUT LIMESTONE. THE FD PK/FLASHER MONUMENT THE LIMESTONE LOCATION.


D) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (a), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 4 of the witness monuments shown on the drawing in (a), above.

AS PREVIOUSLY STATED & SHOWN ON SKETCH, THE 1992 WIDOT DISK, THE 1972 FD PIPE, & 1988 FD REROD THE DOES NOT FIT THE REFERENCE MONUMENTS.

(E) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning the corner location.

I, **Donald Barnes**, hereby certify that the corner location as identified by the corner code index was determined by me under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.


Seal


Emboss

SHEET 2 OF 4

10/13/2009

CORNER CODE **Z-15(2)**
A-E 7.08 REQUIREMENT

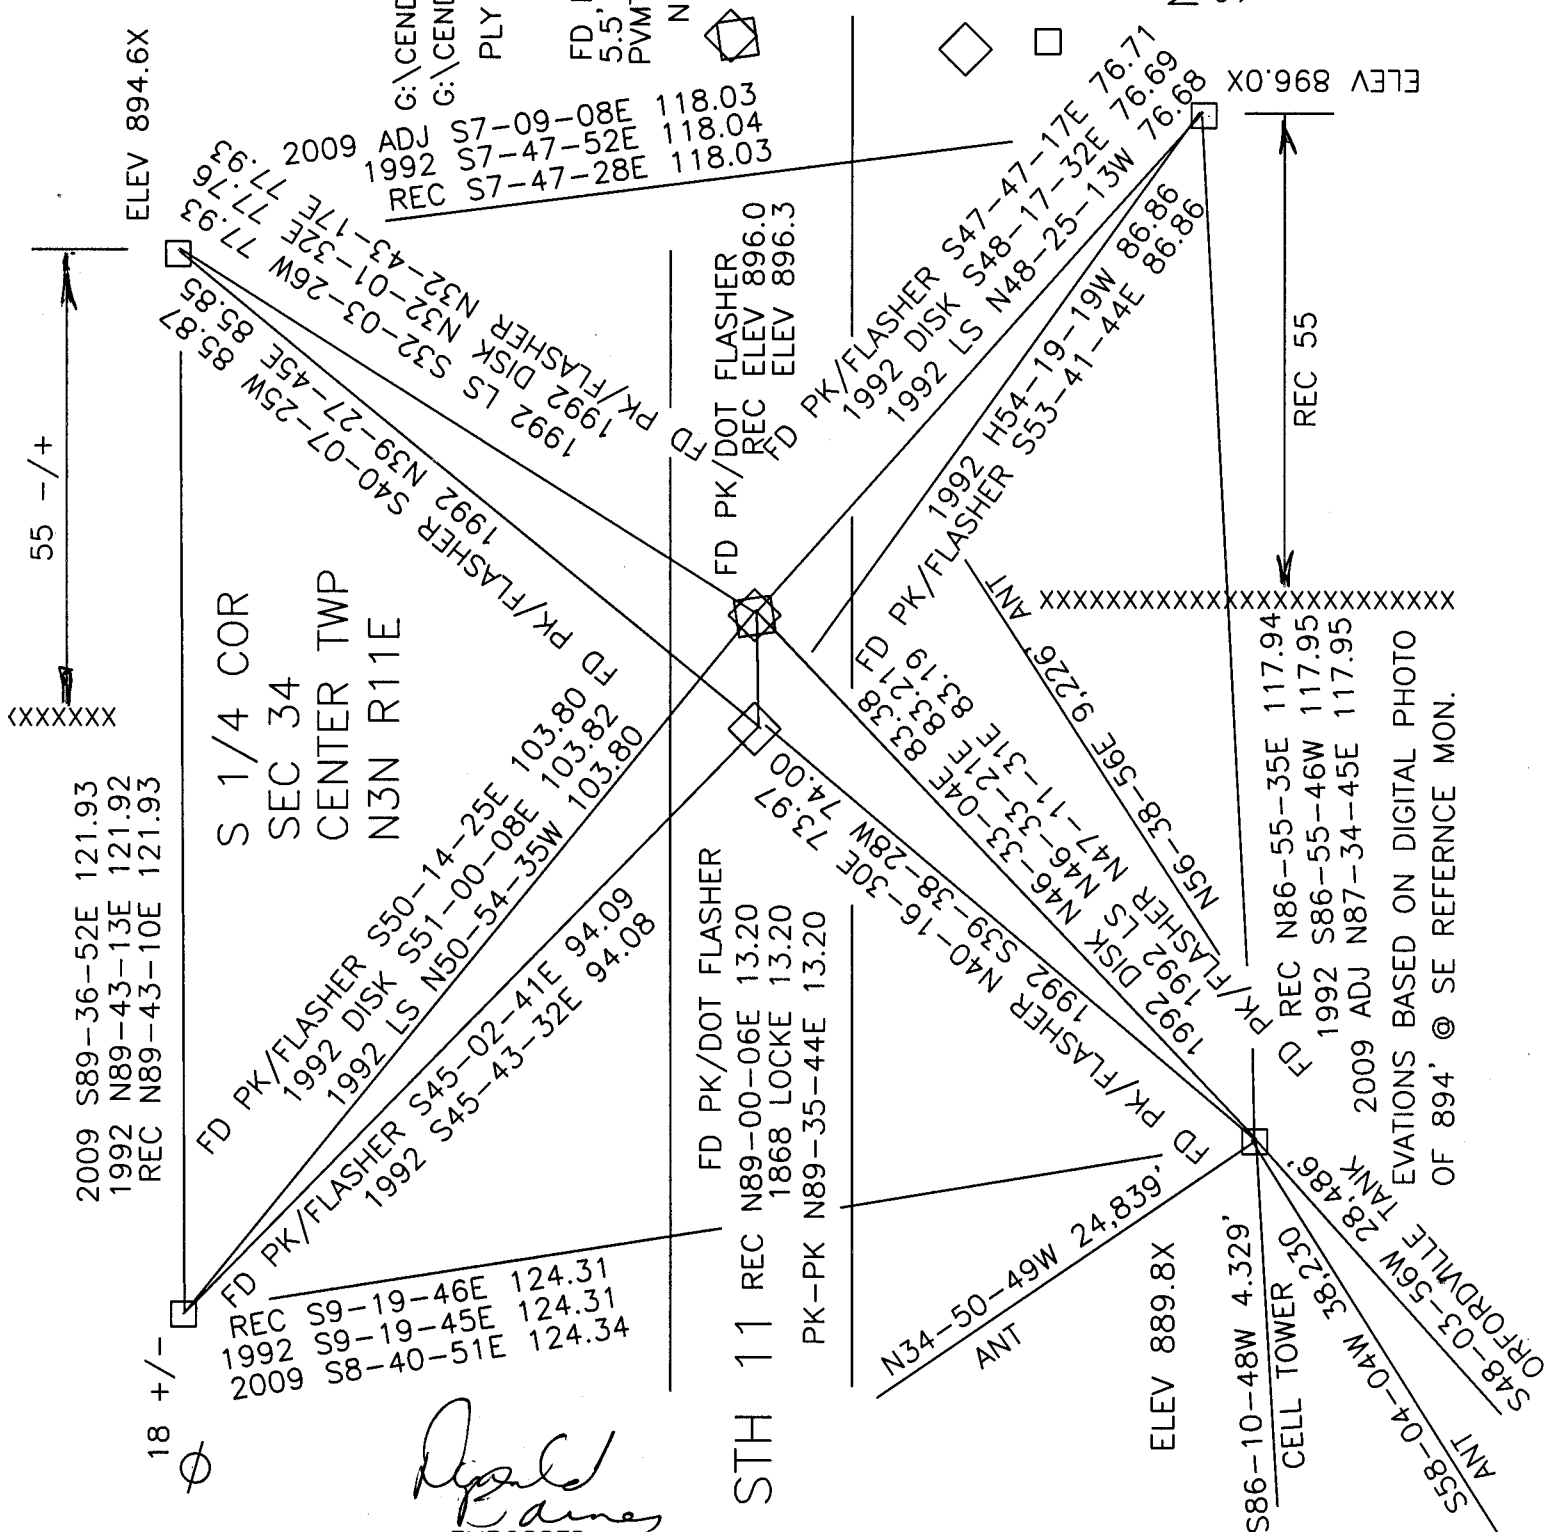

2009 S89-36-52E 121.93
 1992 N89-43-13E 121.92
 REC N89-43-10E 121.93

S 1/4 COR
 SEC 34
 CENTER TWP
 N3N R11E

18 +/-
 REC S9-19-46E 124.31
 1992 S9-19-45E 124.31
 2009 S8-40-51E 124.34

FD PK/DOT FLASHER
 REC N89-00-06E 13.20
 1868 LOCKE 13.20
 PK-PK N89-35-44E 13.20

STH 11

G:\CENDISK\AUTO\628CE.DWG
 G:\CENDISK\SOFT\CE628(SOFT)
 PLY FB#3 PG 42

FD PK/WIDOT FLASHER IS
 5.5' SOUTH OF CENTER OF
 PVMT.

N 1/4 COR SEC 3
 PLYMOUTH TWP
 1992 FD DISK
 1992 FD CUT LIMESTONE

DISK IS 5.0' SOUTH
 OF CENTER PVMT
 S 1/4 COR SEC 34
 FD WIDOT/
 CONC. MON

N 1/4 COR
 SEC 3
 PLYMOUTH TWP
 T2N R11E

ELEV 889.8X

S86-10-48W 4.329'
 CELL TOWER
 S82-30
 38.230

FD REC N86-55-35E 117.94
 1992 S86-55-46W 117.95
 2009 ADJ N87-34-45E 117.95

EVATIONS BASED ON DIGITAL PHOTO
 OF 894' @ SE REFERENCE MON.

David R. Jones
 EMBOSSED
 SEAL

10/13/2009

1995 BARNES A11 26.47
 2009 BARNES N89-22-29E 26.47
 2004 BARNES N89-33-46E 26.41
 2002 REIGEL #14302 26.52
 1997 BARNES 26.42
 1995 LEUBENBERGER CSM18-425 26.46
 1993 COMBS CSM17-75 26.40
 1988 BARNES 6-388 26.40
 1982 WIDOT INVERSE N89-03-59E 26.40
 1868 LOCKE 26.40
 1833 HARRISON 26.40

CENTER TWP

1982 WIDOT MON TO FR SET
 2,249,064.68
 2,220,606.21

34

2009 BARNES N89-34-51E 2658.36
 2004 BARNES N89-34-55E 2658.36
 1993 COMBS CSM17-75 2658.31
 1989 WIDOT INVERSE N88-56-49E 2658.28
 1989 WIDOT 2658.31
 1997 BARNES N89-34-51E 2658.26
 1988 BARNES 6-388 2658.48
 1868 LOCKE 2658.48
 1833 MULLETT 2640.00

1868 LOCKE 13.2
 1933 SUNNY 3-235 13.2
 1976 BARNES 5-204 1.93
 1989 WIDOT N88-56-43E 13.20
 1989 WIDOT INVERSE S36-37-17E 22.13
 1992 BARNES A-15(1) 13.20
 1997 BARNES N89-35-24E 13.20
 199? COMBS A15 13.25
 2004 BARNES N89-34-16E 13.20
 2009 BARNES N89-34-29E 13.20

T3N R11E

2009 ADJ 5326.32
 1997 BARNES 5326.18
 1989 WIDOT 5326.25
 1988 BARNES 6-388 5326.39
 1868 LOCKE REMON 5326.53
 1833 MULLETT 5280

34

2009 BARNES N89-21-39E 2667.96
 2004 BARNES N89-21-40E 2667.99
 1997 BARNES N89-21-37E 2667.92
 1997 BARNES N89-21-37E 2667.92
 1989 WIDOT INVERSE N88-43-23E 2667.91
 1989 WIDOT N88-43-23E 2667.94
 1988 BARNES 6-388 2667.91
 1868 LOCKE 2668.05
 1833 MULLETT 2640

2009 N01-13-59W 2656.66

35

1982 WIDOT 2,217,948.38
 246,015.82
 1988 BARNES 6-386 90-31-17
 2004 BARNES 90-16-104
 1983 HARRISON 2574.00
 1868 LOCKE VAR7-35 2587.20
 1913 OWEN #6336 2560.5
 1988 BARNES 6-386&388 2587.08
 2009 NO-49-20W 2587.06
 2,217,948.38
 2,246,016.25
 1982 WIDOT 2,246,016.25

4

1868 LOCKE VAR6-44 2645.28
 1933 SUNNY 3-235 2645.4
 1988 BARNES 6-388 2645.09
 1989 WIDOT INV N89-20-08E 2644.82
 1997 BARNES N89-34-59E 2644.99
 2004 BARNES N89-34-56E 2645.15
 2009 BARNES N89-34-55E 2645.15
 1982 WIDOT 2,220,619.41
 1989 WIDOT R/W 246,046.92
 CUT LS

3

1868 LOCKE REMON 5300.13
 1933 SUNNY 5299.0X
 1988 BARNES 5299.80
 1989 DOT 5299.99
 2004 BARNES 5299.91
 2009 ADJ 5299.91
 2009 INT S89-17-22E 5283.16
 1855 CHURCH 1-39 5276.70
 1886 RUGER 2-272 VAR4-35 2648.42
 1855 CHURCH 1-39 2638.35
 2009 INT S89-17-22E 2641.73

3

1988 BARNES 6-388 2701.33
 1989 WIDOT 2695.72
 2009 SO-25-42E 2701.37

2

1877 RUGER 2-234 VAR5-37 2697.75
 1868 LOCKE VAR7-16 2702.70
 1833 HARRISON 2666.40
 2,223,273.46
 1989 WIDOT 246,124.14

EMBOSSSED SEAL
 Barnes
 10/13/2009

(2) 15-Z 4 FO 4 SHEET 4 OF 4